

DOPNUMMER: 1104/117705


Fabrieksmethode	Vlak geweven, lussenpool	
Mode de fabrication	Tissé plat, velours bouclé	
Herstellungsverfahren	Flach gewebt, Schlinge	
Manufacturing process	Flat woven, loop pile	
Samenstelling van de pool	65 % coir, 35 % sisal	
Composition du velours		
Nutzschicht		
Pile composition		
Rug	Self laying Bitumen-backing (code 56)	
Dossier		
Rücken		
Secondary backing		
Totale hoogte	10,5 mm	
Hauteur totale		
Gesamthöhe		
Total height		
Poolgewicht	2180 g/m ²	
Poids du velours		
Polgewicht		
Pile weight		
Totaal gewicht	6260 g/m ²	
Poids total		
Gesamtgewicht		
Total weight		
Breedte	ca. 50 cm	
Largeur		
Breite		
Width		
Lengte	ca. 50 cm	
Longueur		
Länge		
Length		
Warmte isolatie	DIN 52612 0,10 m ² K/W (theoretisch)	
Résistance à la conductibilité de chaleur		
Wärmedurchlasswiderstand		
Resistance of heat conduction		
Tog Rating	1,00	
Geluidsisolatie	25 db	
Isolation aux bruits		
Sound insulation		
Schallabsorptions		
Gebruik	Zwaar huishoudelijk gebruik	Medium contract gebruik
Utilisation	Usage domestique intensif	Usage professionnel medium
Verwendungsbereich	Schwere Beanspruchung	Medium Projekt
Suitability	Heavy domestic	General commercial

Leverbaar als rol en als coupon / Livrable en rouleaux et à la coupe / als Rolle und im Coupon lieferbar / available in rolls and cutlengths

Bij verlijming : enkel gebruik van EC1-lijmen ! / En cas de pose collée : seulement utilisation des colles EC1 !

Bei geklebter Verlegung : nur EC1-Klebstoffe verwenden ! / In case of adhesion : only use of EC1 glues !

We reserve the right to modify the characteristics of this product for quality improvement.

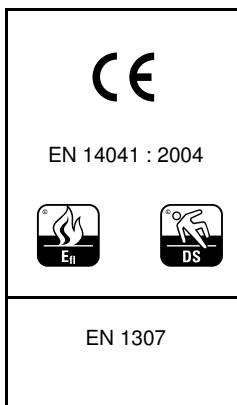

on request



GARANTIE
WAARBORG
5
GARANTIE

